

Series VNR Unidirectional valves

New model

Ports of Thread version: M5, G1/8, G1/4, G3/8, G1/2, G3/4, G1
Dimensions of Tube/Tube version: Ø4; Ø6; Ø8

SERIES VNR UNIDIRECTIONAL VALVES



- » In-line mounting thanks to integrated fittings
- » Low operating pressures
- » Robust design, brass body
- » Version 6580 in FKM with a wide range of chemical compatibility and operating temperatures extended

Series VNR unidirectional valves are available in the Thread or Integrated Fitting version. Thanks to their construction they operate at low pressures.


Valve group	automatic valves
Construction	poppet-type
Materials	brass body stainless steel spring NBR/FKM seals (for version 6580)
Mounting	in any position
Dimensions thread version	M5, G1/8, G1/4, G3/8, G1/2, G3/4, G1
Dimensions tube version	Ø4; Ø6; Ø8
Operating temperature	0°C ÷ 80°C; NBR (with dry air -20 / +80°C) FKM (with dry air -20 / +200 °C)
Medium	filtered air without lubrication. If lubricated air is used, it is recommended to use ISO VG32 oil. Once applied the lubrication should never be interrupted.

Series VNR unidirectional valves



M5-G1/8-G1/4


G3/8-G1/2-G3/4-G1

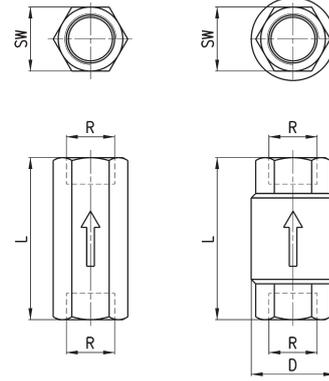

DIMENSIONS								
Mod.	R	L	SW	D	Flow (NI/min)	Min. operating pressure (bar)	Max working pressure (bar)	
VNR-205-M5	M5	25	8	9	50	1	10	
VNR-210-1/8	G1/8	34	13	15	600	0.2	10	
VNR-843-07	G1/4	43	17	20	1400	0.2	10	
VNR-238-3/8	G3/8	55	23	34.5	3000	0.02	25	
VNR-212-1/2	G1/2	58.5	27	34.5	5800	0.02	25	
VNR-234-3/4	G3/4	65	33	41.5	8000	0.06	25	
VNR-201-01	G1	74.5	40	48	13000	0.06	25	

Series VNR unidirectional valves

New

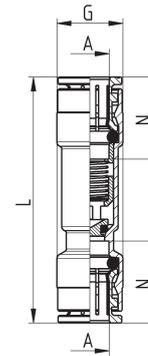

Mod.	A	G	L	N	Flow 6 bar ΔP1(NI/min)	Min. operating pressure (bar)	Max operating pressure (bar)	Weight (g)
6580 4-VNR	4	9	40	14	85	0,5	10	13
6580 6-VNR	6	12	48	16	450	0,2	10	20
6580 8-VNR	8	14	52.5	17.5	900	0,2	10	30